


Heat Insulation Window Film

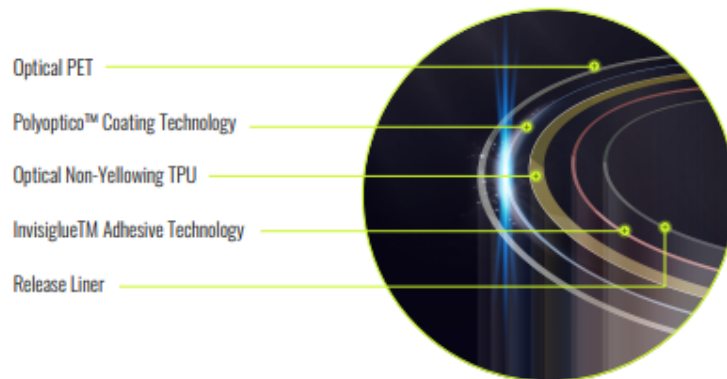

CATEGORY	VALUE	CATEGORY	VALUE
Heat Rejection	Up to 99% infrared (IR) blocking	UV Protection	Blocks 99% of UV rays
Visible Light Transmission (VLT)	Available in multiple shades (5%, 20%, 35%, 50%, 99%)	Glare Reduction	Up to 80%
Scratch Resistance	Hard-coated for durability	Adhesive Type	Pressure-sensitive, bubble-free application